

DRYWALL FLANGE KIT

-DK

(while supplies last. Scheduled for de-listing Jan. 2019)

General:

MOUNTING FRAME ASSEMBLY for mounting recessed Tbar fixtures into drywall ceilings.

Sizes:

Available for 12"x 24", 24"x 24", 24"x 48" grids.


May be used for any typical grid troffer, ie.

PIONEER TB series.

Construction:

Rigid, lightweight extruded aluminum.

Mitred corners c/w assembly screws.

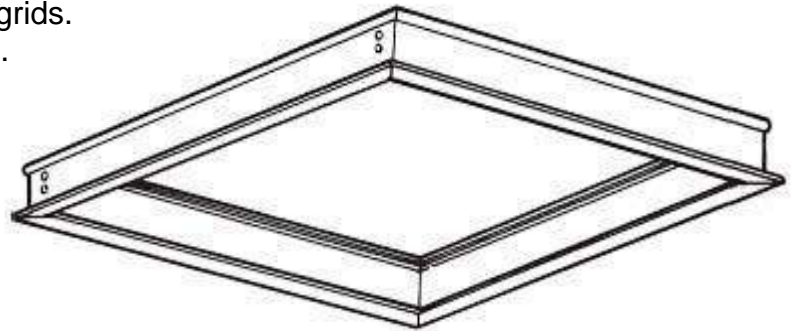

Finish:

Baked white polyester enamel gloss.

INSTALLATION INSTRUCTIONS

1. Wire up troffer, put through ceiling cutout and slide off to one side
2. Assemble the four sides of drywall kit with screws provided
3. Mount in ceiling cutout (see sizes below)
4. Loop & fasten wire hanger (supplied by others) through holes in frame
5. Mount securely to joist/support/ceiling deck
6. Slide fixture over drywall kit and drop into place
7. Adjust position of fixture to centre of frame to avoid gaps

Note: Wiring of fixture (step 1) can be done *after* the drywall framing kit is installed (step 5), if there is sufficient slack in the feed wire.

MODEL NUMBER	FIXTURE SIZE	CEILING WIDTH	CUTOUT LENGTH
DK14	1' X 4'	12 1/2"	48 3/4"
DK22	2' X 2'	24 1/2"	24 3/4"
DK24	2' X 4'	24 1/2"	48 3/4"



PIONEER LIGHTING

300 Dwight Avenue, Toronto, Ontario M8V 2W7, CANADA
TEL: (416) 255-0405 www.pioneerlighting.com FAX: (416) 255-4002