

# RECESSED LOW PROFILE PREMIUM

## FEATURES

- CUSTOM for 30" x 30" grid

**LED Premium** Recessed ceiling fixture ideal for offices & retail, requiring higher lumen output & better distribution. Sleek contemporary appearance.

**CONSTRUCTION** Die-formed of heavy-duty 24 ga. pre-painted steel with parabolic BWE reflector. Accessplate on the top allows for quick easy wiring. Custom optics enhance performance & efficiency.

**LENS** High-efficient moulded acrylic **6" wide** frosted linear diffuser for optimum distribution and performance.

**COLOURS & CRI** Available in 3000K, 3500K, 4000K, 5000K. Optional 6500K. 82 CRI is standard.

**OPERATION** -20°C to 40°C (-40°C optional) L70 at 115,000 hrs. with 5 yr. warranty; L85 at 52,000 hrs. with 10 yr. warranty.

**ELECTRICAL** Available in 120V, UNV, or 347V. Thermally protected driver. 0-10v dimming standard.

**LISTINGS** CSA for Canada & US.



**NOTE** Due to continuing improvements in LED technology, specifications are subject to change.


## Ordering Information

MODEL (W x L)	LUMENS '000's	COLOUR	VOLTS	OPTIONS	TO ORDER	
<b>R TBS-3030-W</b>	3	4	5	6	6.4	Start with model, add lumens, colour, voltage, & options.  <b>Example:</b> R TBS-3030-W-6L-40K-120 20"x 30" fixture, 6040 lumens, 4000k colour, 120V
	3000		120	<b>W</b>	WIDE lens	
	3500		277	<b>PWD</b>	Pre-wired dimming	
	4000		347	<b>EM</b>	Emergency pack	
	5000		UNV (120-277v)	<b>CT</b>	-40C min. start	
				<b>AH</b>	Air slots	



LUMENS Initial	Approx. Delivered	WATTS	LPW Initial	LPW Del'd
3,440	2,924	23	153	127
4,340	3,689	29	151	127
5,420	4,607	37	147	125
6,040	5,134	42	144	122
6,430	5,466	42	153	130

\*\* Also available in 750mm x 750mm metric size. Consult factory \*\*

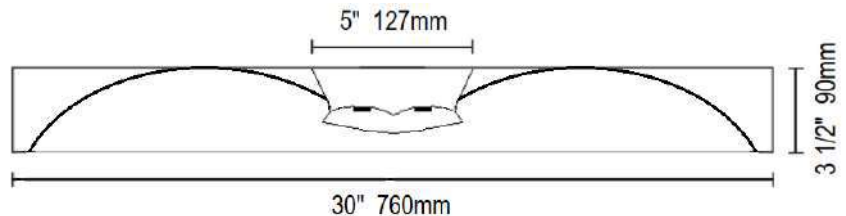

R TBS-30-W Profile View

Please consult factory for additional lumen packages and options